

CROSSWALK
(OR LIMIT LINE)

200'
For Bike Lane Stripe Details
See City of Chino Hills
Std Dwg No. 400

*5'
MIN

±600'

6'

R26(A)S (CA)
R81 (CA)

15'

ECR

NOTES:

1. BIKE LANE LINES SHALL BE 6"-WIDE WHITE STRIPE PAINT (3-COAT) TO THE APPLICATION THICKNESS (10-12MILS PER COAT) PER THE LATEST CALTRANS STANDARD SPECIFICATIONS.
 2. ALL BIKE LANE LEGENDS SHALL BE CONSISTENT WITH THE LATEST CAMUTCD AND CALTRANS STANDARDS.
 3. LEGENDS AND ARROW MARKINGS SHALL BE WHITE PAINT (3-COAT) TO THE APPLICATION THICKNESS (10-12MILS PER COAT) PER THE LATEST CALTRANS STANDARD SPECIFICATIONS.
- * 7' PREFERRED, 5' MINIMUM.


APPR. BY: *SCN* 1/14
STEVEN C. NIX, CITY ENGINEER DATE

CITY OF CHINO HILLS
ENGINEERING DEPARTMENT

DATE	REVISION	BY

BIKE LANE

401
SH 1 of 2

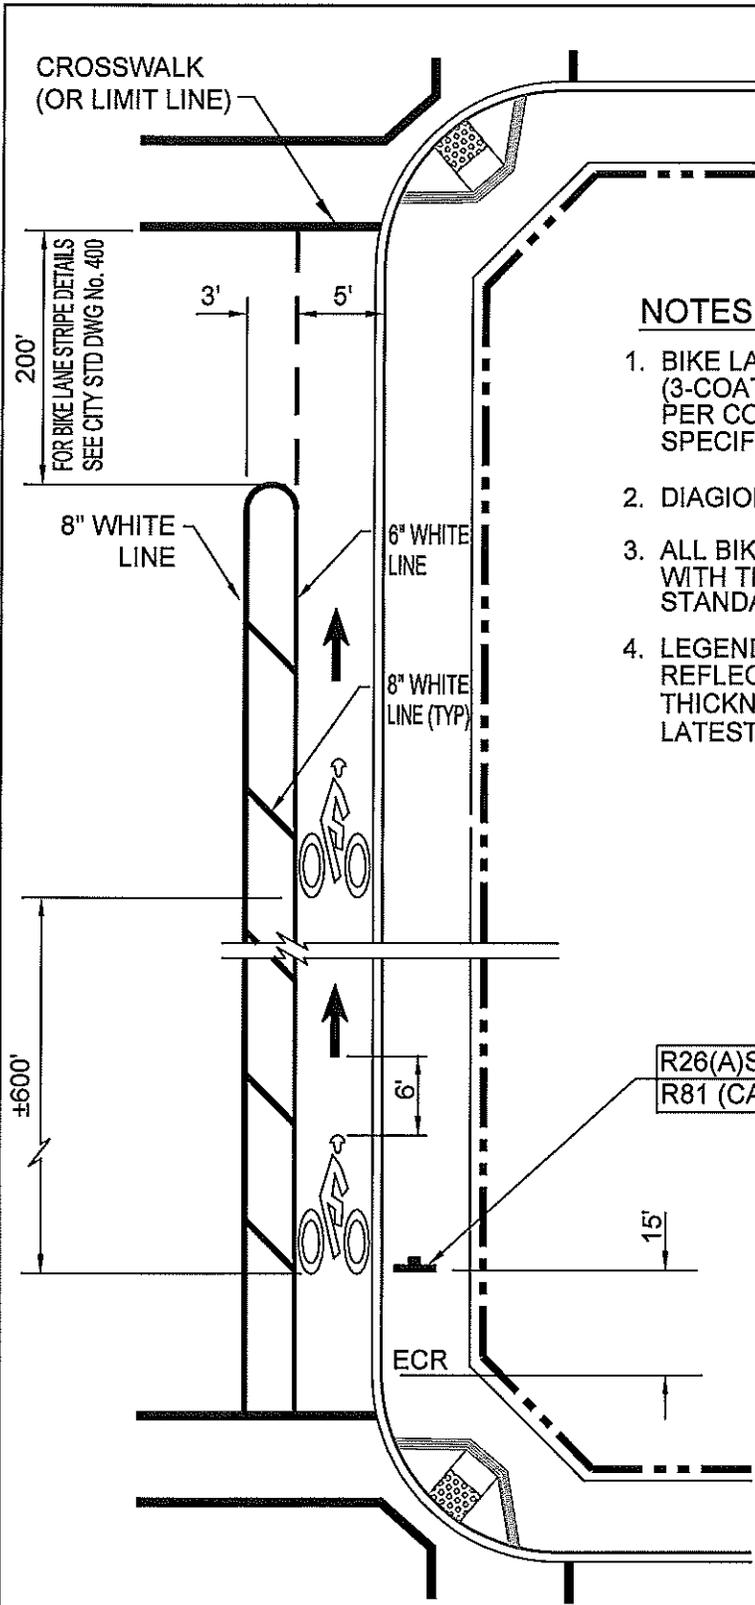

NOTES:

1. BIKE LANE STRIPING SHALL BE WHITE REFLECTIVE PAINT (3-COAT) TO THE APPLICATION THICKNESS (10-12MILS PER COAT) PER THE LATEST CALTRANS STANDARD SPECIFICATIONS.
2. DIAGONAL STRIPE LINES SHALL BE 50' SPACED APART.
3. ALL BIKE LANE LEGENDS SHALL BE CONSISTENT WITH THE LATEST CAMUTCD AND CALTRANS STANDARDS.
4. LEGENDS AND ARROW MARKINGS SHALL BE WHITE REFLECTIVE PAINT (3-COAT) TO THE APPLICATION THICKNESS (10-12MILS PER COAT) PER THE LATEST CALTRANS STANDARD SPECIFICATIONS.

APPR. BY: *[Signature]* 1/14
 STEVEN C. NIX, CITY ENGINEER DATE

CITY OF CHINO HILLS
 ENGINEERING DEPARTMENT

DATE	REVISION	BY

BUFFERED BIKE LANE

401
 SH 2 of 2