


CURB ADJACENT

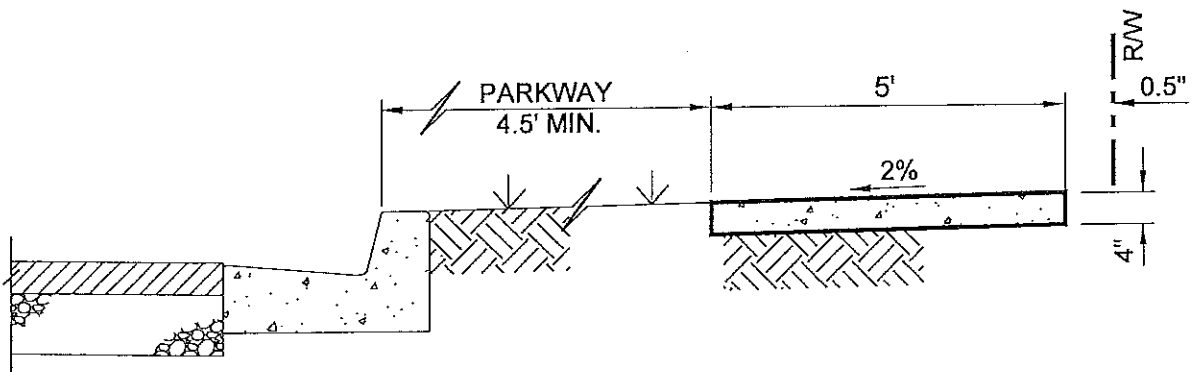

PROPERTY LINE ADJACENT

NOTES:

1. PRIOR TO REMOVAL, EXISTING P.C.C. SIDEWALK SHALL BE SAWCUT AT A SCORELINE.
2. A SUITABLE HERBICIDE SHALL BE APPLIED TO SUBGRADE WHERE SIDEWALK IS TO BE PLACED..
3. CONCRETE SHALL BE 520-C-2500 P.C.C., CURED WITH WHITE PIGMENT COMPOUND.
4. SIDEWALK SHALL HAVE SCORELINES AT 5' INTERVALS, WEAKENED PLANE JOINTS AT 10' INTERVALS AND 1/2" PAPER EXPANSION JOINTS AT 60' INTERVALS. JOINT LOCATIONS SHALL MATCH CURB JOINTS.
5. FINISH SHALL BE FINE BROOM.
6. VARIANCE OF SIDEWALK DIMENSIONS SHALL REQUIRE THE APPROVAL OF THE CITY ENGINEER.
7. THE SUBGRADE UNDER THE SIDEWALK AND DRIVEWAY APPROACHES SHALL BE SCARIFIED TO A DEPTH OF AT LEAST EIGHT (8) INCHES AND MOISTURE SHALL BE APPLIED TO MAINTAIN FREE WATER ON THE SURFACE FOR AT LEAST 24 HOURS PRIOR TO PLACING CONCRETE AND THE SUBGRADE SHALL THEN BE PREPARED WITHOUT COMPACTIVE EFFORT.

APPR. BY: Steven C. Nix 04/11
 STEVEN C. NIX, CITY ENGINEER DATE

CITY OF CHINO HILLS
 ENGINEERING DEPARTMENT

DATE	REVISION	BY

SIDEWALK

107