


SECTION A-A

SECTION B-B

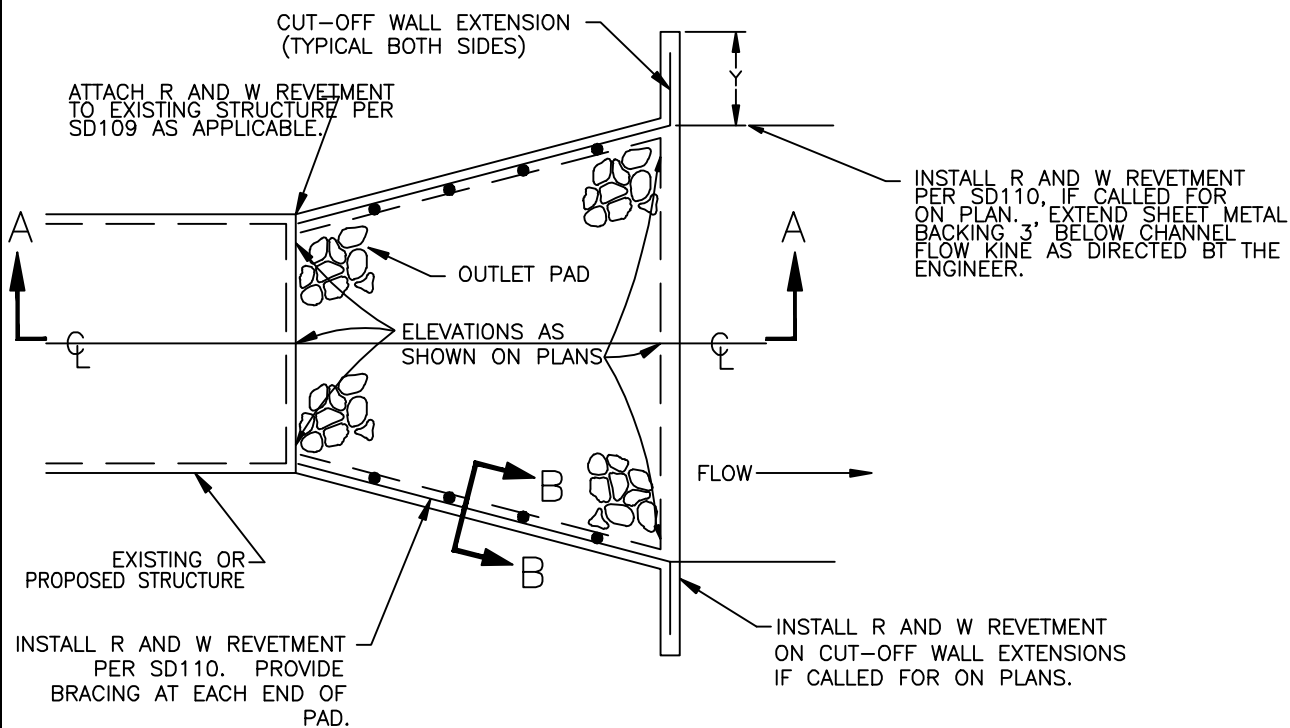

TYPICAL PLAN

NOTES:

1. DIMENSIONS OF THE OUTLET PAD AND DIMENSIONS "X" AND "Y" TO BE AS SHOWN ON THE PLANS.
2. CONCRETE TO BE 560-C-3250 CONCRETE UNLESS OTHERWISE NOTED ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. ALL REINFORCING BARS SHALL BE GRADE 60.
4. CLEAN, ROUGHEN AND REMOVE SCUM AND LOOSE AGGREGATE FROM THE FACE OF ALL EXISTING CONCRETE AGAINST WHICH NEW CONCRETE IS TO BE POURED. WET SURFACE AND APPLY A COATING OF CEMENT GROUT. POUR THE NEW CONCRETE AGAINST THE GROUT BEFORE IT SETS.

CITY OF CHINO HILLS

CHRIS VOGT
CITY ENGINEER

**GROUTED STONE OUTLET
PAD DETAIL**

SD108